


Fantom™

Bypass

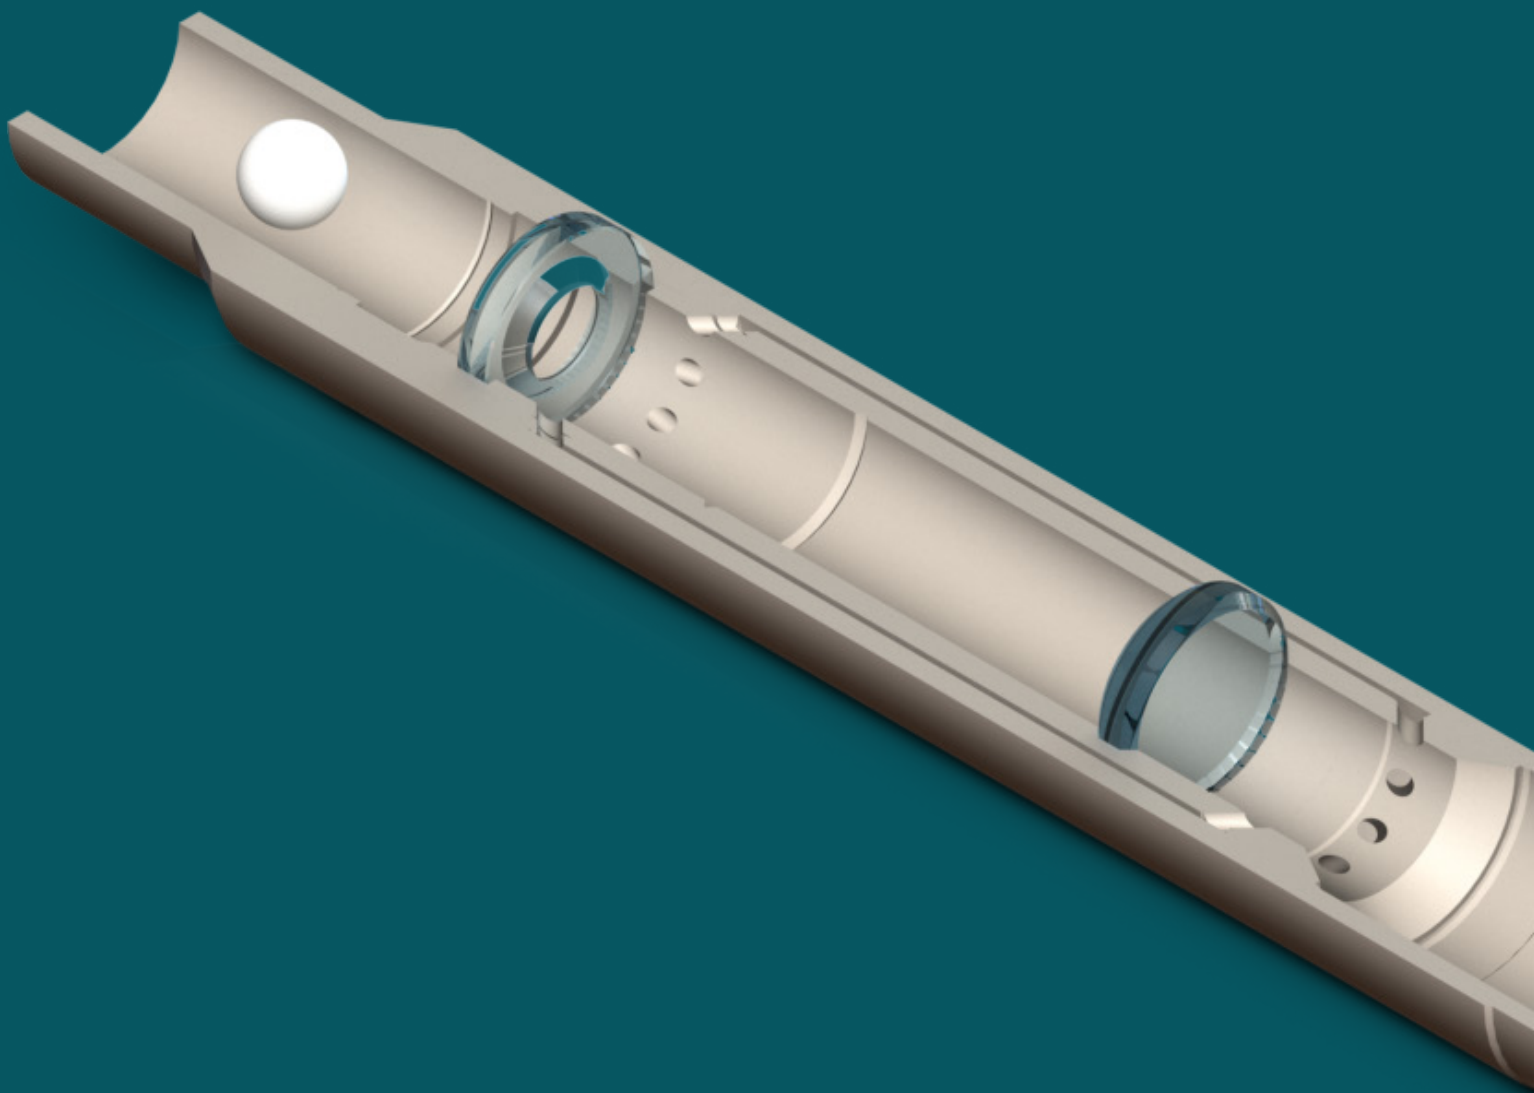

Fantom™

Bypass



4 standard sizes



Customizable ID and OD



WiFi E-trigger



ISO/API Validated




10000 Max psi




320 Max °F

Key Activated

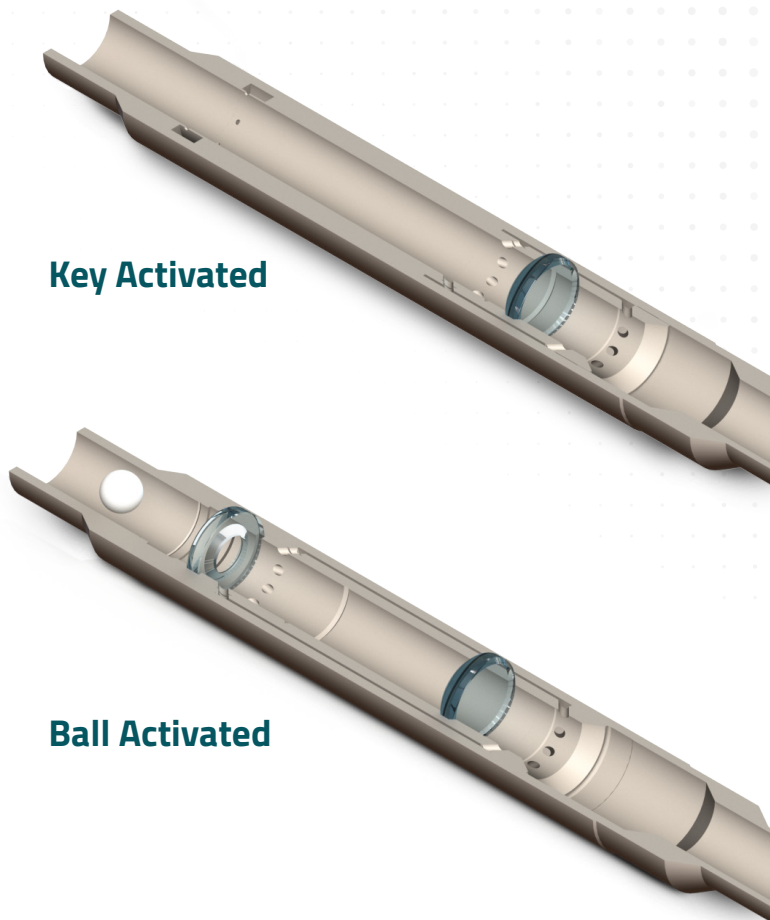

Ball Activated

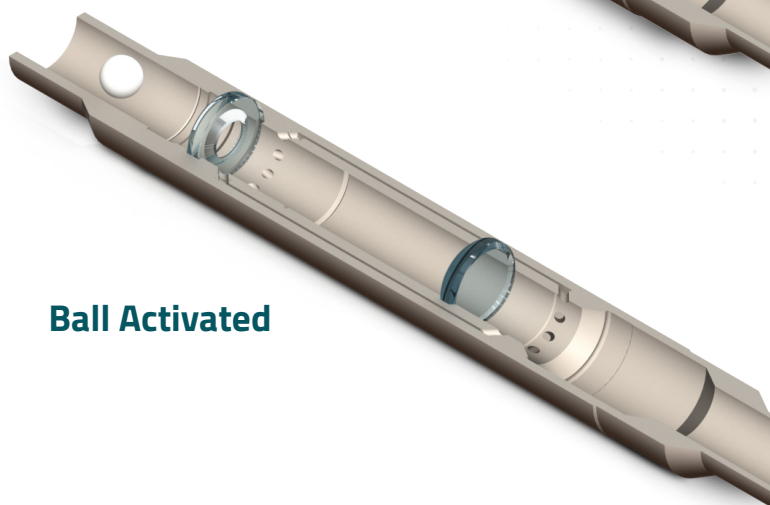

During RIH, the Fantom™ Barrier can be run with the flow ports open, allowing autofill at rates up to 8 BPM. This improves well control, reduces surge effects and supports a smoother, more efficient deployment to depth.

Key Activated

At depth, a programmed pressure signature closes the sleeve, providing upstream pressure integrity for the remaining completion activities. Once completed, a second pressure signature opens the Fantom™ Barrier, delivering genuine full-bore ID without intervention.

Ball Activated

At depth, a ball is dropped to close the sleeve, providing upstream pressure integrity for the remaining completion activities. Once these are completed, the Fantom™ SBS and Barrier are opened without intervention, delivering genuine full-bore ID.

Need more information?

Visit www.entechteam.com or contact us at sales@entechteam.com